

A vintage, slightly faded photograph showing four people in an industrial or construction setting. In the foreground, a large pile of open cardboard boxes is visible, some with shipping labels like '415-88822' and 'SHUER'. A man in a white t-shirt and jeans stands on the left, looking towards the others. Next to him, a man in a light-colored short-sleeved shirt and sunglasses stands with his arms crossed. In the center, a man wearing a dark tank top, a baseball cap, and shorts stands with his back to the camera. To the right, a fourth person is partially visible, sitting or leaning over. The background is filled with metal scaffolding and structural elements of a building under construction.

**“HEALTH”**

**CATEGORY [5 of 8]**  
**Florida Green Building Coalition**





H2.1 (1 OF 1) FOUNDATION FORM SHOWING  
VERTICAL SHEER FOR CBS AND SLAB



## **H2.2 (1 OF 2) 12 In. Pipe Clean-Out, French Drain on and Around Footing**







H2.2 (2 OF 2) 12 In. Pipe Prior  
to Ground Insertion, Drainage  
on and Around Footing



## H2.3 (1 OF 2) Topsoil and Gravel Screening Machine





## H2.3 (2 OF 2) Gravel for Slab from Screening Machines





**H2.4 (1 OF 1)  
Seal through  
Slab at Base  
(White)**






Cement Board

STRENGTH BENEATH THE SURFACE



891 01/04/17 11:33 INSTRUCTIONS USG.COM

**H2.8 (1 OF 2) Cement Board Only,  
Fully Sealed (No Green Board)**



USG  
Cement Board



USG Durock<sup>®</sup> Brand  
Cement Board  
STRENGTH BEHIND THE SURFACE



3961M05/23/17 1836 INSTRUCTIONS USGCM

**H2.8 (2 of 2) Cement  
Board Only**






**H3.1 (1 of 1) No Exposed Urea-  
Formaldehyde (Fully Laminated)**



## H3.2 (1 of 3) Zero VOC Drywall Paint







**SUPERIOR HIDE AND COVERAGE**  
COBERTURA Y OCULTAMIENTO SUPERIOR

**GREAT FLOW AND LEVELING**  
EXCELENTE FLUIDEZ Y NIVELACIÓN

**ZERO VOC\***  
CERO COV\*

SEMI-BRILLANTE • BASE BLANCO

\*VOC < 5 g/L including colorant  
\*COV < 5 g/L including colorant

**H3.2 (2 of 3) Zero VOC Interior Paint**



**H3.2 (3 OF 3)**  
**Zero VOC**  
**Interior and**  
**Exterior Paint**





### H3.4 (1 of 2) Photo Low VOC Adhesives





## H3.4 (2 of 2) Specs Shown Low VOC Adhesives



Credit: Diversified Brands

### What makes this product green?

- Low-emitting

### Description


Sherwin-Williams offers two sealants under its **GreenSure** designation, **with VOC content of less than 0.5% by weight**. SherMax urethanized elastomeric sealant is available in white and clear, and PowerHouse siliconized acrylic latex sealant is available in white and colors. Both are recommended for a range of applications. GreenSure product packaging contains at least **25% post-consumer recycled material**.

Read more: <http://www.greenbuildingadvisor.com/product-guide/prod/sherwin-williams-caulks-and-sealants#ixzz4tFfOt9oi>

Follow us: [@gbadvisor on Twitter](#) | [GreenBuildingAdvisor on Facebook](#)



**H3.6 (1 of 1) Linoleum  
+ water based adhesive**







### H3.8 (1 of 4) Protect Ducts, Rangehood and Bath Exhaust Fans





**H3.8 (2 of 4) Protect Ducts**



### **H3.8 (3 of 4)**

## **Protect AC Ducts**





### H3.8 (4 of 4) Protect Ducts and Electrical Service





**H5.1 (1 of 1) 751 ADA Unit Photo  
Universal Design Unit**





## H6.3 (1 of 1) Floor Drains Sealed







H6.3 (1 of 1) Non  
Asphalt Moisture  
Resistant Sealer




# BROAN®

## MODEL AE80B INVENT™ SERIES FAN

Energy  
Star  
lighting  
package  
inc. fans  
ventilating  
and ceiling  
H6.4?

ICATION SHEET



E2.26

### DESCRIPTION

#### BLOWER:

- Plug-in, permanently lubricated motor - engineered for continuous operation
- Dynamically balanced centrifugal blower wheel for quiet, efficient performance
- Low RPM for quiet operation

#### HOUSING:

- Rugged, 26 gauge, galvanized steel construction
- Polymeric, 4" duct connector with tapered sleeve and no metallic clatter
- 5-3/4" height allows for 2" x 6" ceiling installations
- Sturdy, easy, four-point mounting directly to joist
- Can be mounted in ceiling up to 7" pitch

#### GRILLE:

- Polymeric construction
- Innovative design - the result of extensive research with designers and consumers

#### CONTROLS (Purchase separately):

- Refer to Broan's catalog for a complete line of accessories to effectively adapt these fans to your construction requirements.

U.L. Listed for use over bathtubs and showers when connected to a GFCI protected branch circuit (ceiling mount only).

U.L. Listed for use in insulated ceilings (TYPE I.C.)

1-Year Warranty

### TYPICAL SPECIFICATION

Fan shall be Broan Model AE80B.

Fan shall have corrosion resistant galvanized steel housing with four-point mounting capability. It shall be ducted to a roof or wall cap using 4" round ductwork.

Blower assembly shall be removable, have a centrifugal-type blower wheel and a permanently lubricated motor designed for continuous operation.

Non-metallic damper/duct connector shall be included.

Air delivery shall be no less than the airflow values and no greater than the sound level values listed in the HVI Performance Specifications provided in this specification (see following chart). All air and sound ratings shall be certified by HVI.

Exhaust ventilation shall be U.L. Listed for use in insulated ceilings (Type I.C.) and for use over bathtubs and showers when connected to a GFCI protected branch circuit.



Broan-NuTone LLC Hartford, Wisconsin www.broan.com 800-558-1711

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by
			Date

51H

99045362C



# PERFORMANCE RATINGS INVENT™ SERIES FANS

## HVI PERFORMANCE

Model	0.1 Ps - Static Pressure (in H2O)				0.25 Ps
	Airflow (CFM)	Sound (Sones)	Power (Watts)	Efficacy (CFM / W)	Airflow (CFM)
AE80B	80	1.5	26.9	2.97	60





HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

## ELECTRICAL & WEIGHT

Model	Volts	Hz	Amps	Shipping Weight
AE80B	120	60	0.3	10.0



## AIR FLOW PERFORMANCE

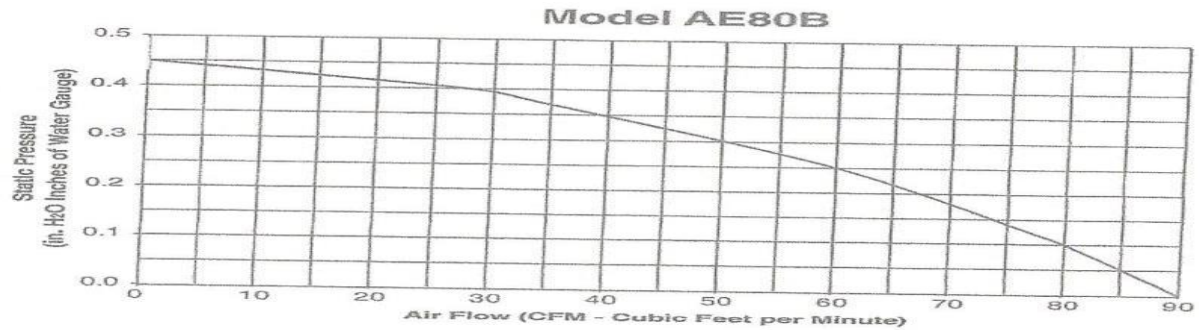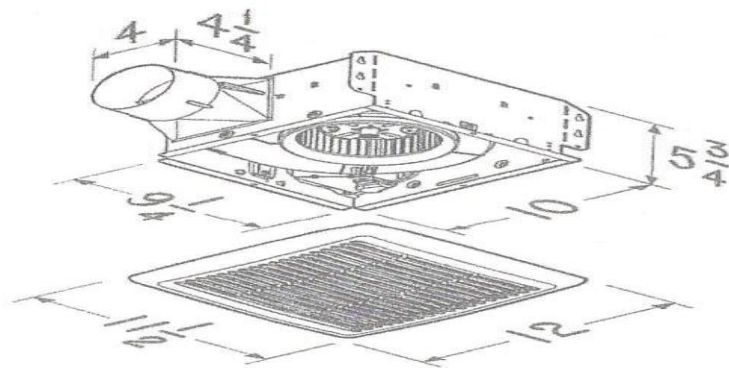

H6.4 (2 of 2) “Energy Star” Bath Fans

**BROAN**

Broan-NuTone LLC    Hartford, Wisconsin    [www.broan.com](http://www.broan.com)    800-558-1711





**H6.10 (1 of 1) Window  
and Door Screens**



## H3.2 (1 OF 1) Zero VOC Interior and Exterior Paint

