



1615 EDGEWATER DRIVE, STE 200,  
ORLANDO, FLORIDA 32804  
T 407.975.1273  
F 407.975.1278  
www.smeinc.com

Florida Firm Registration No. 6712

Regal Cinema Landscape

Key West

NO.	DATE	DESCRIPTION	BY	CHK	APV

PROJECT NUMBER  
527118137

DRAWING NUMBER  
**L1.0**

DRAWING NAME  
LANDSCAPE  
IMPROVEMENT  
PLAN

PLANT SCHEDULE

TREES	CODE	QTY	BOTANICAL NAME	COMMON NAME	CONT.	CALIPER
	BS	3	BURSERA SIMARUBA	GUMBO LIMBO	---	4" CAL. 14'-16" OA.
	SP	2	SABAL PALMETTO	CABBAGE PALMETTO	---	8'-10' C.T.

VALUE OF TREES PROVIDED:  
4 Gumbo Limbo x 4" x 4 Credits = 64" Credit Inches Provided

TREES TO BE REMOVED



Tree No. 5 & No. 6




Tree No. 6 & No. 7



Tree No. 7



Tree No. 9

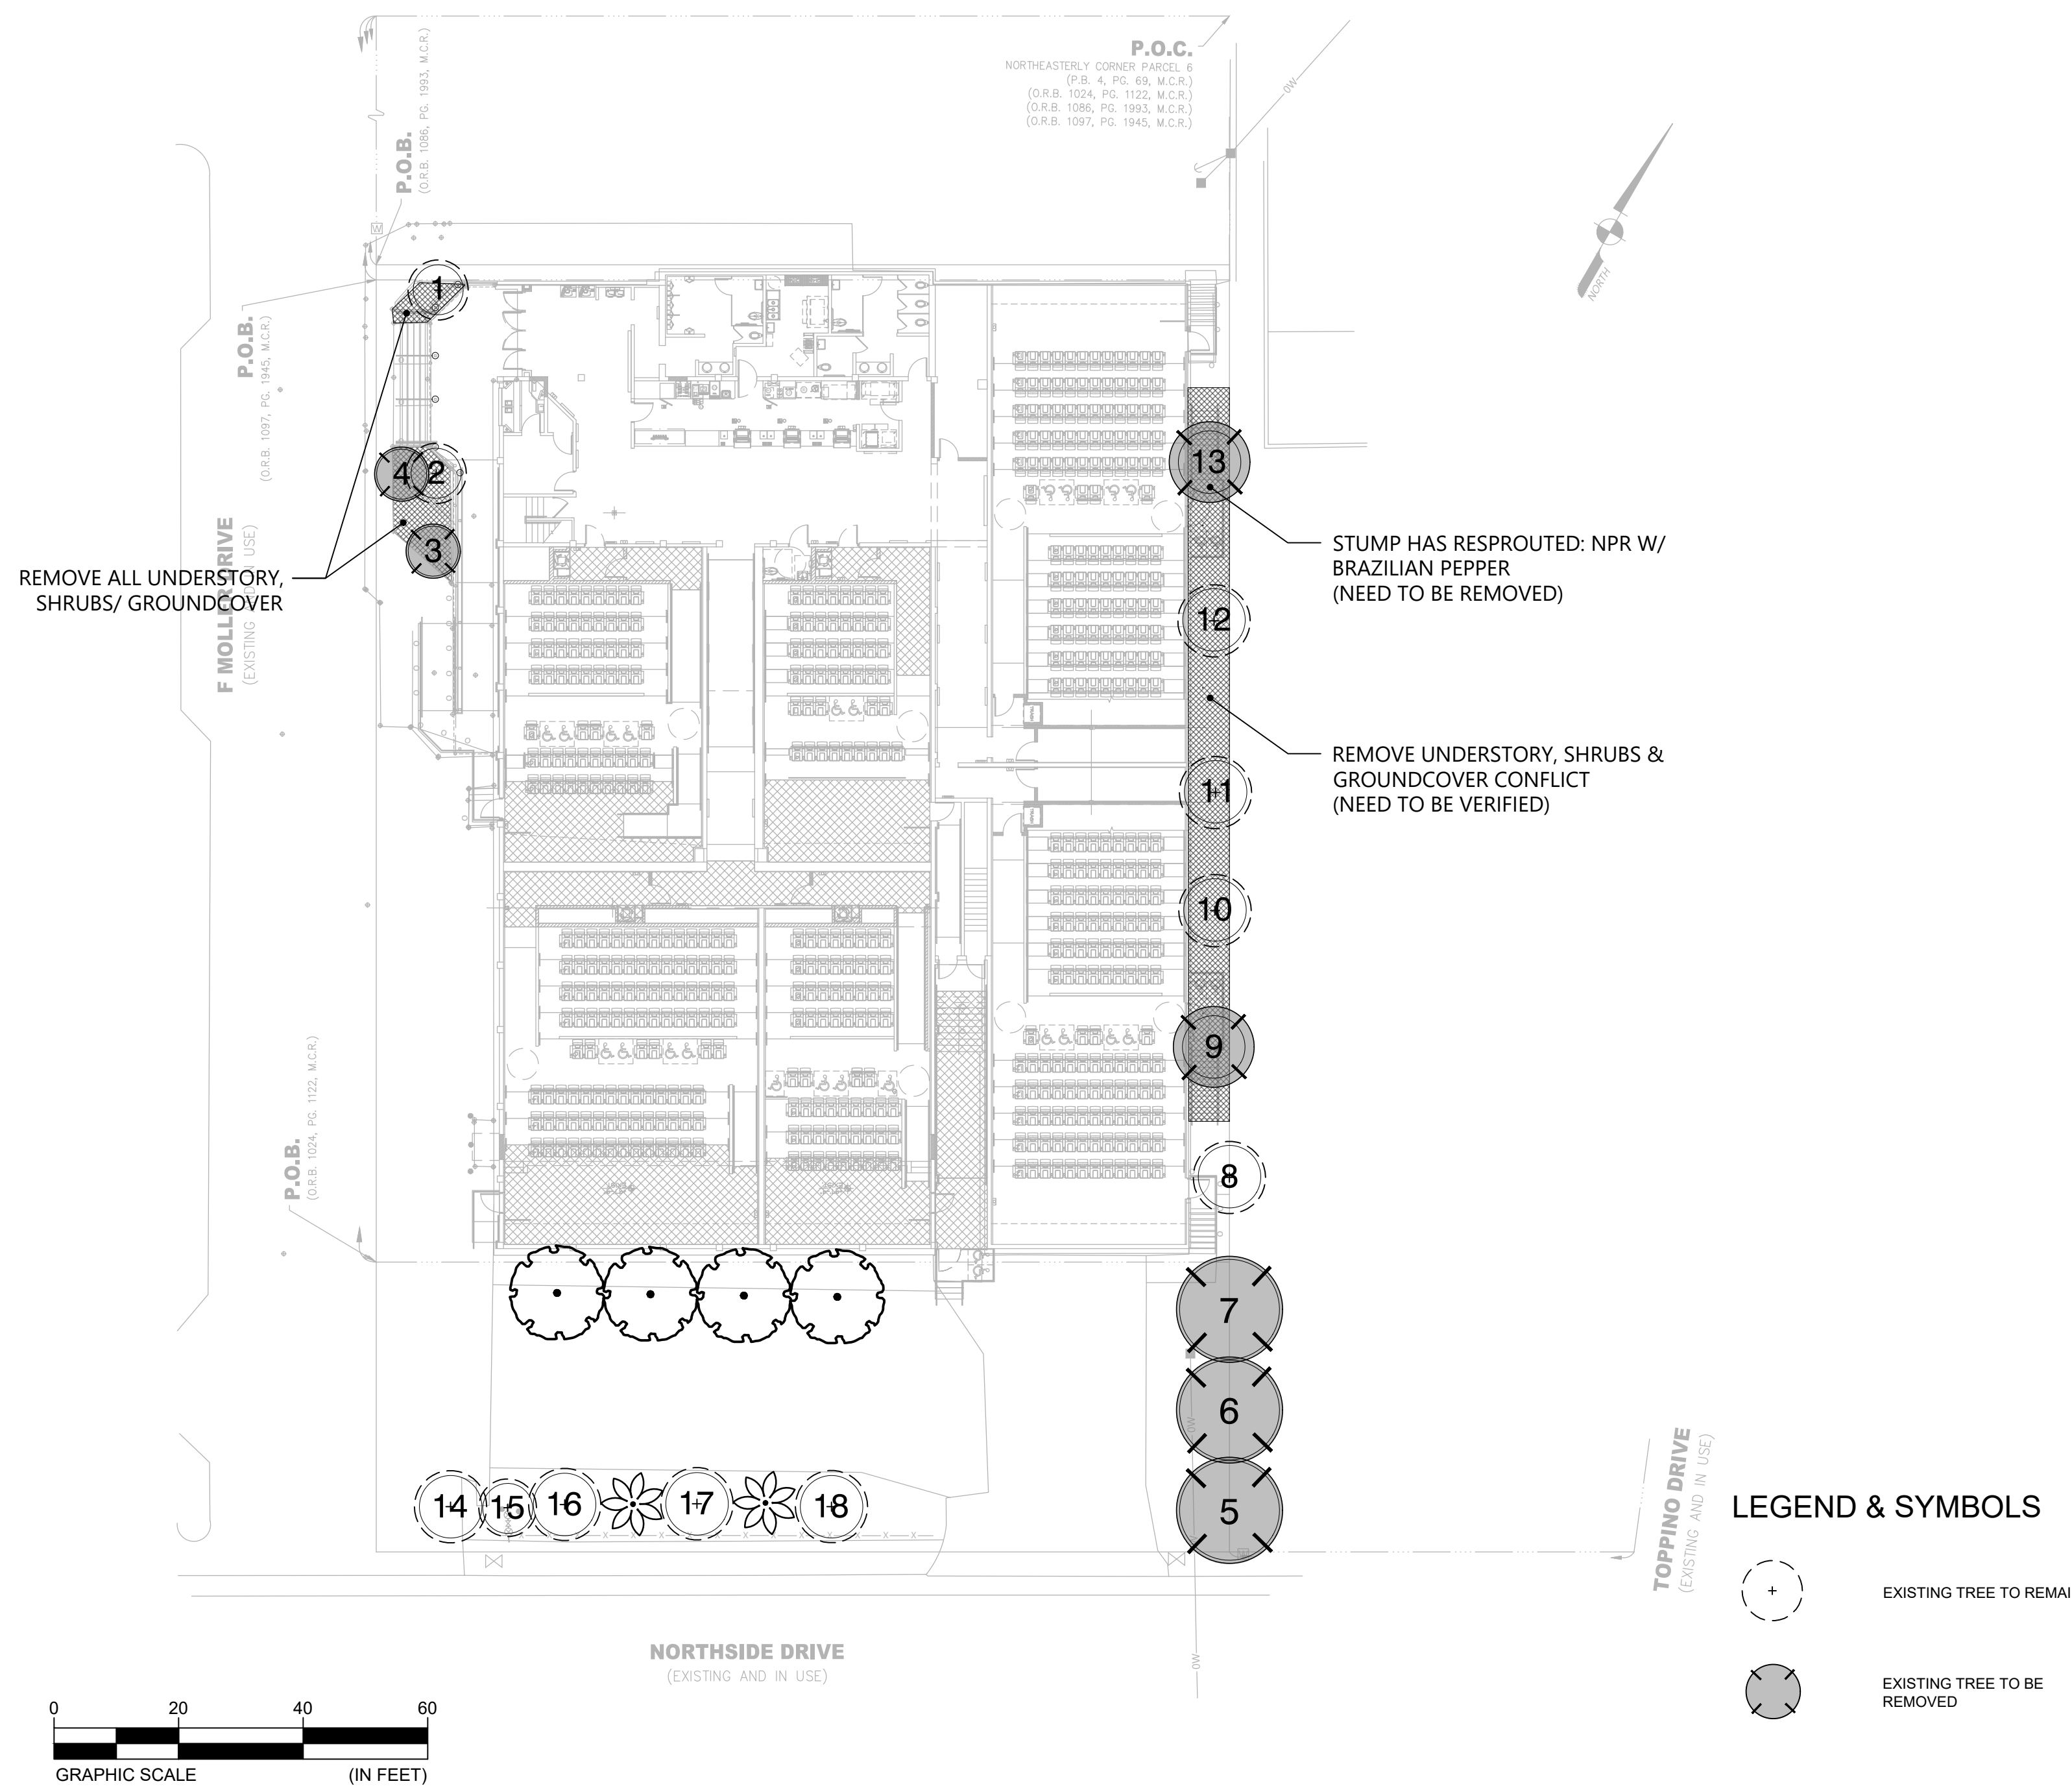

LANDSCAPE INVENTORY DISPOSITION

MAP ID	Latin Name	Common Name	DBH (in)	Clear Trunk (ft)	Existing Condition	Impact	Regulated	Note
1	Sabal palmetto	Sabal Palm	/	8	Good	Remain	REG	/
2	Sabal palmetto	Sabal Palm	/	12	Good	Remain	REG	/
3	Sabal palmetto	Sabal Palm	/	12	Good	Remove	REG	Removed due to new building plan
4	Hypophorbe lagenicaulis	Bottle Palm	/	12	Good	Remove	/	Removed due to new building plan
5	Bursera simaruba	Gumbo Limbo	12	/	Fair	Remove	REG	Removed due to overhead power line conflict
6	Bursera simaruba	Gumbo Limbo	14	/	Fair	Remove	REG	Removed due to overhead power line conflict
7	Coccoloba uvifera	Seagrape	Multi-trunk	/	Fair	Remove	REG	Removed due to overhead power line conflict
8	Sabal palmetto	Sabal Palm	/	6	Good	Remain	REG	/
9	Coccoloba uvifera	Seagrape	Multi-trunk	/	Good	Remove	REG	/
10	Coccoloba uvifera	Seagrape	Multi-trunk	/	Good	Remain	REG	/
11	Coccoloba uvifera	Seagrape	Multi-trunk	/	Good	Remain	REG	/
12	Chamaerops	Fan Palm	/	6	Good	Remain	REG	/
13	Coccoloba uvifera	Seagrape	/	/	Heavily Damaged	Remove	/	Removed due to new building plan
14	Coccoloba uvifera	Seagrape	/	/	Good	Remain	REG	/
15	Coccoloba uvifera	Seagrape	/	/	Good	Remain	/	Shrub
16	Swietenia mahagoni	Mahogany Tree	10	/	Fair	Remain	REG	/
17	Sabal palmetto	Sabal Palm	10	/	Fair	Remain	REG	/
18	Swietenia mahagoni	Mahogany Tree	/	3	Good	Remain	REG	/

Total Replacement Requirements: 49.3 Cal. Inches

T:\Projects\2018\18-137\_Regal Cinema Key West\CAD\Construction\527118137\_L1.0 DEM.dwg-L1.0 Feb 01, 2019 wlu